

Published with Open Access at **Journal BiNET**

Vol. 16, Issue 01: 1301-1308

Journal of Bioscience and Agriculture ResearchJournal Home: www.journalbinet.com/jbar-journal.html

Performance evaluation of a modified seed drill for row crop planting under rainfed farming conditions

Abdalla S. Abdalla¹ Abdelkarim D. Elfadil^{1*} and Mohamed R. Mohamed²¹Dept. of Agricultural Engineering, Faculty of Agricultural science, University of Gezira, Wadmedani²Ministry of Agriculture, Northern Kordofan State, Sudan✉ Corresponding author*: karimfadil@yahoo.com

Article Received: 22.08.17; Revised: 12.12.17; Published online: 31 December 2017.

ABSTRACT

Increasing demand for the optimization of crop production necessitates the use of precision planting for both timeliness and subsequent field operations. This study was carried out at Almigrih to compare the performance of a modified seed drill (VISPA) with the conventional wide level disc (WLD) traditionally used for sowing in the rainfed subsector. Results showed that seed drill was 60% faster and efficient than the WLD, about 60% less fuel consumption. VISPA can save about half the sesame seeds consumed by the WLD at 5cm within row spacing. For sorghum, the VISPA gave the recommended population at 25cm within row spacing while the WLD about 337% of the recommended.

Key Words: Seed drill, Rainfed farming, Sesame, Sorghum and Wide level disk

Cite Article: Abdalla, A. S., Elfadil, A. D. and Mohamed, M. R. (2017). Performance evaluation of a modified seed drill for row crop planting under rainfed farming conditions. Journal of Bioscience and Agriculture Research, 16(01), 1301-1308.

Crossref: <https://doi.org/10.18801/jbar.160117.161>



Article distributed under terms of a Creative Common Attribution 4.0 International License.

I. Introduction

Increasing importance of timing for the vital cultural operations necessitates the gradual replacement of hand labor and animals by machinery, not only for such arduous tasks as land preparation, but also where labor bottlenecks occur in tasks such as planting (Pothecary, 1968). The main limiting factor for crop planting is the weather and soil conditions prevailing during the planting period. Heavy rainfall and adverse soil conditions are likely to cause time losses, and these are aggravated by the necessity for high standards of operation and supervision if planters are to operate efficiently. The purpose of most planters and drills (excluding broadcast planters) is to plant seeds evenly in rows or on beds (Breece et al., 1981). Abernathy and Porterfield (1969) reported that the principal functions of a planter are to open a furrow for the seed, meter seeds at the desired rate, placing seeds and fertilizer in the ground, cover and firm the soil around the seeds.

Richey (1961) reported that the planters must accomplish the planting process without damaging the seeds, plant at the desired seed rate, place seeds uniformly distributed or in hills at the desired depth covering and compacting the soil as desired around the seed. Bainer et al. (1963) mentioned that the primary function of planting operation is to establish an optimum plant population and spacing, and that the ultimate goal is to obtain the maximum net return per acre. The mechanical planters are also required to apply fertilizers at the required rates, and place them at the proper position relative to the seeds or otherwise, manipulate the soil to provide an optimum soil physical condition for seed germination and emergence. The Wide Level disk (WLD) is the dominant seeding implement for all crops under rain-fed subsector in the Sudan that is because it can perform the operations of weed control and sowing the seeds in one pass. In this case seeds are often placed too deep or too shallow thus causing variation in seed emergence, uneven and patchy stand. The broadcasted pattern of seeds lead to plant stand that is impossible to control weeds with an inter-row cultivator. Moreover, manual weeding of broadcasted plants usually results in decreasing the plant stand by unintentional weeding of some crop seedling and decreased the yield (Anonymous, 1988). Precision planters accurately place single seeds or groups of seeds almost equidistant apart along a furrow. They are typically used to plant crops that require accurate control of plant population, and spacing between and along the rows. Precision seed metering systems giving a precision drill, hill drop or check row planting pattern are used on this type of planting machine. But it is very complex and very expensive. This experiment was conducted to evaluate the performance of a locally modified seed drill for row crop planting under rain fed farming conditions.

II. Materials and Methods

Experimental site: The experiment was conducted during the rainy season 2012-2013 at al Megrih, west of Gedarif town (Sudan). Two types of planting machines were used, a four-row drilling machine referred to as (VISPA), with an external flute type drilling mechanism, two hoppers, each with two metering units, and a wide level disk with an external fluted seed metering wheels, seed box, disks gang and main frame, a chisel plow composed of long straight shanks, and double ended 6-cm wide shear points. Chisel shanks are mounted on a rectangular frame on two gangs seven shanks three front shanks and four shanks at the rear at spacing of 60 cm on each row. The shanks arranged in a zigzag pattern to give 30 cm spacing. The tillage depth was 10 cm. The experiment layout was two factors randomized complete block design. The dimension of blocks was (150×21m=3150m²). For the study of plant population three crops were selected and sown by the two machines. Sesame crop was used for further comparison between the two machines regarding plant height and bottom capsule height.

Experimental method

Planting: Sesame was sown on 25th and 27th of July, sunflower sown on the 1st of August and sorghum was sown on the 4th of August.

Operating speed: The machine speed was obtained using the following equation:

$$\text{speed (km/hr)} = \left[\left(\frac{280\text{m}}{\text{time in seconds to travel 280m}} \right) \left(\frac{3600\text{sec/hr}}{1000\text{m/km}} \right) \right] \dots\dots\dots (01)$$

Field capacity: The theoretical field capacity was calculated with the following equation:

$$\text{theoretical field capacity} \left(\frac{\text{km}}{\text{hr}} \right) = \frac{S \cdot W}{c} \dots\dots\dots (02)$$

Where,

- S = Forward speed of the seed drill (km/hr)
- W = The operating width of the drill (m)

The same equation of the theoretical capacity was used to measure the actual field capacity by multiplying by the actual machine width.

Fuel consumption measurements: The fuel consumption was measured by filling the tank with fuel then operating the land with each of the tested planters. At the end of the task the fuel tank was refilled to estimate the corresponding fuel consumption.

Plant population: For counting the plant population for the WLD, twenty random samples were taken after four weeks, by throwing the square rectangular frame at random, and then the plants within the frame area were counted.

Spacing between plants (VISPA): A metal tape was used for measuring within row spacing between plants for the VISPA hundred consecutive spacing were measured. Lines were randomly picked. Four replications were taken. Measurements were taken after four weeks from germination.

Plant height: Measurements were conducted when the crop was at full maturity and before harvesting.

Bottom capsule height: Measurements of bottom capsule height from ground for sesame and capsule zone were taken using a metal tape. Twenty random readings for each plot were taken. These measurements were conducted simultaneously with total plant height measurements.

III. Results and Discussion

Machine field parameters

Table 01 contains the specifications of the two machines and their field capacity, field efficiency and fuel consumption. Regarding the measured parameters, VISPA was better than the WLD. VISPA was found to be about 69% faster and efficient in field coverage, the machine is easy to maneuver and by nature it works in a continuous pattern, therefore, the time efficiency was found to be 94% as compared to 72% for the WLD. As fuel consumption per hectare, WLD was found to consume about 60% more than the fuel consumed by VISPA. VISPA can be considered as a minimum or zero tillage planter, therefore, this result agreed with [Rawat et al. \(2006\)](#) who stated that the zero tillage sowing was found to be most time (88%) and energy (79%) efficient as compared to conventional method of sowing. The zero tillage sowing was more economical (79%) in comparison to conventional method.

Table 01. Seed drills measured parameters

Machine parameters	VISPA	WLD
Theoretical working width (m)	3.20	4.14
Effective working width (m)	3.20	3.00
Speed (km/hr)	11.80	7.00
field capacity (ha/hr)	3.54	2.11
Efficiency (%)	94.00	72.00
Fuel consumption (l/ha)	2.98	4.76

Plant population

Sesame

The seeding performance was measured after the emergence of seeds, thereafter; seeding count was measured for assessment of plant population. [Hajo \(2005\)](#) reported that the recommended plant population for sesame is 220 thousand plant/ha (22 plant/m²). The actual population for the three settings for VISPA (5, 7.5 and 10 cm within row spacing) and for the control (WLD). The results for sesame gave 18, 13, 11 for VISPA and 42 for WLD plant/m² with corresponding spacing for (VISPA) of 7, 10 and 11 cm for spacing 5, 7.5 and 10 cm respectively ([Table 02](#)). The populations percentages were 81, 57, 52 and 191% for VISPA (5, 7.5 and 10 cm) and WLD, as compared to the recommended, respectively ([Table 03](#)).

This result indicated that VISPA can save about half of the seeds at setting 5cm, with acceptable within row distribution and overall population of sesame, rows can allow inter-row cultivation or easy and higher efficiency of manual weeding. This result agreed with [Weiss \(1971\)](#), who stated the superiority of row planting over broadcasting.

Table 02. Average plant population/m² of sesame crop for seed drill

Seed drill	Spacing between plants (cm)		Plant population/m ²	
	Theoretical	Actual	Theoretical	Actual
VISPA	5cm	7cm	25	18
	7.5cm	10cm	17	13
	10cm	11cm	13	11
WLD				42

Table 03. Total plant population of sesame

Seed drills	Plant population per ha				
	Theoretical (Calculated)	Actual Calculated	%from theoretical	recommended	%from recommended
VISPA(5cm)	250000	178600	71	220000	81
VISPA(7.5cm)	166667	125000	75	220000	57
VISPA(10cm)	125000	113600	90	220000	52
WLD		420000		220000	191

Within row spacing

The results of spacing between plants for VISPA planter was estimated by measuring 100 plants. Means of the treatments resulted in 7cm, 10cm and 11cm for spacing setting of 5, 7.5 and 10 cm respectively. Setting 10cm, resulted in better spacing accuracy (90%) as compared to spacing 5cm (71%) and spacing 7.5cm (75%). [Table 04](#) showed results of analysis of variance for spacing between plants. It showed an inverse relation between plant spacing and C.V.

Table 04. Analysis of variance for spacing between plants in sesame by VISPA

Spacing setting (cm)	SE	C.V
VISPA 5cm	1.27	29.98%
VISPA 7.5 cm	1.05	17.67%
VISPA 10 cm	0.67	10.19%

Sorghum

[Hajo \(2005\)](#) reported that the recommended plant population for sorghum is 130 thousand plant/ha (13 plant/m²). The results gave 16, 13, 9 for VISPA and 45 for WLD plant/m² with corresponding spacing for (VISPA) of 8, 10 and 14 cm for spacing 5, 7.5 and 10 cm respectively ([Table 05](#)). [Table 06](#) shows that the populations percentages were 117, 93, 66 and 337% for VISPA (5, 7.5 and 10 cm) and WLD, as compared to the recommended respectively. Setting 7.5 cm agreed exactly with the recommended population of 13plants/m². Using the WLD found to consume a considerable amount of seeds (about four times the recommended). Result for VISPA showed plant population more or less three plants than recommended for 5cm, 10cm and within recommended for 7.5cm spacing between plants, and give good distributed stand than WLD. As in row spacing can allow inter-row cultivation or easy and higher efficiency of manual weeding.

Table 05. Average plant population/m² of Sorghum

Seed drill	Spacing between plant (cm)		Average plant population/m ²	
	Theoretical spacing	Actual spacing	Theoretical	Actual
VISPA	5cm	8cm	25	16
	7.5cm	10cm	17	13
	10cm	14cm	13	9
WLD				45

Table 06. Total plant population of sorghum

Seed drills	Plant population per fed an to sorghum				
	Theoretical	Actual	%from theoretical	Recommended	%from recommended
VISPA(5cm)	250000	156250	63	133333	117
VISPA(7.5cm)	166667	125000	75	133333	93
VISPA(10cm)	125000	89285	71	133333	66
WLD		450000			337

Table 07. Analysis of variance for spacing between plants in sorghum by VISPA

Spacing between plants (cm)	SE	C.V
VISPA 5 cm	0.87	20.27%
VISPA 7.5 cm	2	34.04%
VISPA 10 cm	1.48	17.66%

Within row spacing

Means of the treatments resulted in 8cm, 10cm and 14cm for spacing setting of 5, 7.5 and 10 respectively. Setting 7.5cm resulted in better spacing accuracy (75%) as compared to spacing 5cm(63%) and spacing 10cm (71%). Table 07 showed results of analysis of variance for spacing between plants. It showed an inverse relation between plant spacing and C.V.

Sunflower

Tajuldin (2005) reported that the recommended plant population for sunflower is 15 thousand plants/fed. (4 plant/m²). Table 08 and 09 and Figure 03 showed the expected and the actual population for the three settings for VISPA(20, 25 and 33 cm within row spacing). Results showed 7, 4 and 3 plants/m² for spacing 20, 25 and 33 cm respectively, with corresponding average spacing of 18, 28 and 35 cm. The resulted spacings were within the range of the expected 20, 25 and 33 cm. The metering mechanism accuracy was found to be directly related to seed size; the larger the seed the more accurate is the metering device. The percent of plant population as compared to the recommended showed that although spacing 20cm expected to give (175%) however, it resulted in (194%) while spacing 25 and 33cm resulted in (125%) and (100%) respectively.

The analysis of variance showed significant different ($p= 0.05$) for plant population per square meter between three spacing. Results which is nearly double the recommended population (194%) for 20cm and within recommended for (25cm and 33cm spacing between plants). VISPA give good distributed in row spacing can allow inter-row cultivation or easy and higher efficiency of manual weeding.

Table 08. Average plant population/m² of Sunflower by VISPA

Seed drill	Spacing between plant (cm)		Average plant population/m ²	
	Theoretical spacing	Actual spacing	Theoretical	Actual
VISPA	20cm	18cm	6	7
	25cm	28cm	5	4
	33cm	35cm	4	3

Table 09. Total plant population/fed of sunflower

Seed drill	Plant population per fedan				
	Theoretical population	Actual population	%from theoretical	Recommended	% from recommended
VISPA20cm	62500	69440	111	35700	194
VISPA25cm	50000	44640	89	35700	125
VISPA33cm	37850	35700	94	35700	1.00

Within rowspacing

Means of the treatments resulted in 18cm, 28cm and 35cm for spacing setting of 20, 25 and 33 respectively. Setting 20cm, resulted in better spacing accuracy (111%) as compared to spacing 33cm (94%) and spacing 25cm (89%). Table 10 showed results of analysis of variance for spacing between plants. It showed an inverse relation between plant spacing and C.V.

Table 10. Analysis of variance for spacing between plants in sunflower by VISPA

Spacing between plants	SE	C.V(%)
VISPA (20cm)	3.35	31.65
VISPA (25cm)	2.84	18.17
VISPA (33cm)	4.26	21.15

Table 11. Plants population/fed for VISPA

Crops	Spacing between plants			Fluctuation
	5 cm	7.5 cm	10 cm	
Sesame (%from recommended)	80	56	51	62
Sorghum (%from recommended)	117	93	66	92
	Spacing between plants			
	20 cm	25 cm	33 cm	
Sunflower (%from recommended)	194	125	100	139

Plant Parameters (Sesame)

Total plant height

Figure 01 showed the results of plant height. For VISPA the plant height was found to be 118, 111, 126 and 90 cm for spacings 5, 7.5, 10cm and the WLD cm respectively. The analysis of variance showed no significant different between the results of the treatment. However, row planting resulted in higher plants as compared to all results showed plant heights more than the critical height of broadcasting. 70 cm plant height was found to be the minimum height for using mechanical reapers (Elebaid, 2011). This result agreed with (Langham et al., 2006) under high moisture conditions, sesame plant can reach 1.3- 2.0 m in height. In dry land conditions, it is generally 1.0 - 1.7m, depending on rain.

Bottom capsule height

Results of bottom capsule height for the spacing 5cm, 7.5cm and 10cm were shown in Figure 02. Bottom capsule height were found to be 51cm, 57cm and 55 cm for spacings 5, 7.5 and 10 cm respectively, while the wide level disk resulted in 57cm. Analysis of variance showed no significant differences on bottom capsules height for the different treatments.

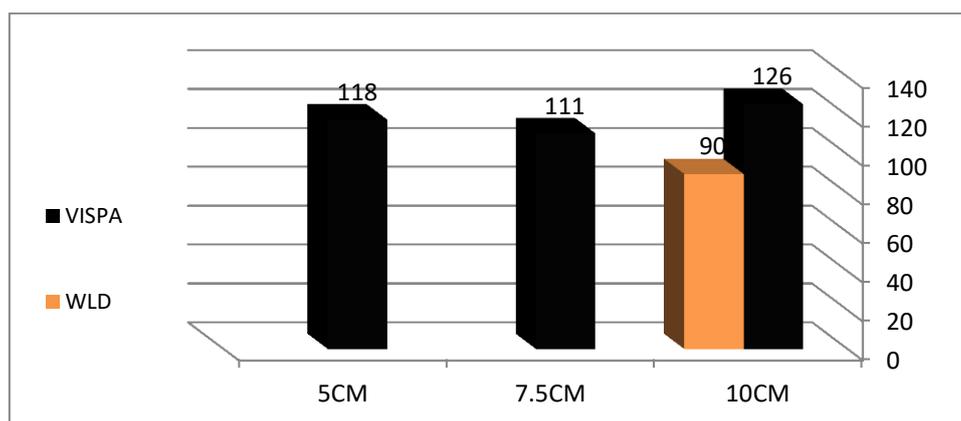


Figure 01. Average plant height of sesame for the VISPA and WLD.

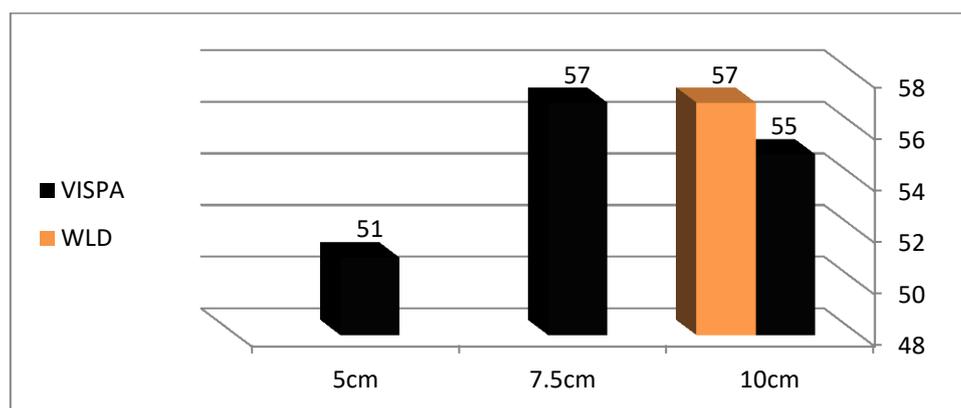


Figure 02. Average capsule height by VISPA and(WLD).

Number of branches

The number of branches per plant was found to be four branches for the spacing 5cm, three branches for both 7.5 and 10cm spacing, while the branching for the WLD was only two branches per plant.

Number of capsule per plant

The numbers of capsule per plant were 40, 26 and 30 for the spacing 5cm, 7.5cm and 10cm respectively. While number of capsule for the WLD was only 17 capsules. The analysis of variance showed no significant difference between the two seed drills. However VISPA resulted in higher number of capsules than WLD for all spacings. This was due to the fact that capsules setting started at the same height but row plants resulted in taller plants and of more branches as compare to broadcasting by the WLD of to the number of branches.

IV. Conclusion

The wide level disk suffers from uneven seed distribution and produced higher plant population, while VISPA produced plant population within the recommended range and can save 50% of the seed compared to the WLD. Fuel consumption, field efficiency and effective field capacity were significantly improved by VISPA.

V. References

- [1]. Abernathy, G. H. and Porterfield, J. G. (1969). Effect of planter opener shape on furrow characteristics. *Journal of Agricultural Engineering*, St. Joseph, Michigan, U.S.A. 12 (1), 16.
- [2]. Anonymous (1988). Sudan-Canada Mechanized Dryland Farming Project, 1988 Annual Report, Appendix, Volume II.
- [3]. Bainer, R., A. R. Kepener and Barger, E. L. (1963). *Principles of Farm Machinery*. 3rd Edition. John Wiley and Sons, Inc., New York, London.
- [4]. Breece, H. E., Harsen, H. V. and Hoener, T. A. (1981). *Fundamentals of Machine Operation: Planting*. Deere and Company, Moline, Illinois, U.S.A.
- [5]. Elebaid, J. I. (2011). Performance evaluation of the self-propelled sesame cutter-binder under gedarif farming conditions, Gedarif State, Sudan. Unpublished M. SC. Thesis university of Gezira. Sudan.
- [6]. Hago, T. M. (2005). *Field Crops in Sudan*. Sudan Open University Printing Press
- [7]. Langham, D. R., G. Smith, T. Wiemers, and Riney, J. (2006). *Sesame Growers Pamphlet*. Sesaco Corporation. Lubbock. San Antonio. Texas.
- [8]. Potheary, B. P. (1968). *A guide to the Mechanization of Agriculture in the Sudan Gezira Scheme*. Sudan Gezira Board, Barakat, Sudan.
- [9]. Rawat, S. N and Varma, M. R. (2006). Performance evaluation of zero-till fertilizer seed-drill for wheat crop. *Karnataka Journal of Agricultural Sciences*, 19(2), 348-351.
- [10]. Richey, C. B. (1961). *Seeding and Planting Machines*. Agricultural Engineering Handbook. McGraw-Hill Book Company, Inc., New York, Toronto, London.

[11]. Tajuldin, M. H. (2005). Field crops in Sudan. Sudan Open University.

[12]. Weiss, E. A. (1971). Castor, Sesame and Safflower. Leonard Hill Books, London. pp. 311–525.

HOW TO CITE THIS ARTICLE?

Crossref: <https://doi.org/10.18801/jbar.160117.161>

APA (American Psychological Association)

Abdalla, A. S., Elfadil, A. D. and Mohamed, M. R. (2017). Performance evaluation of a modified seed drill for row crop planting under rainfed farming conditions. Journal of Bioscience and Agriculture Research, 16(01), 1301-1308.

MLA (Modern Language Association)

Abdalla, A. S., Elfadil, A. D. and Mohamed, M. R. "Performance evaluation of a modified seed drill for row crop planting under rainfed farming conditions". Journal of Bioscience and Agriculture Research, 16.01(2017): 1301-1300.

Chicago and or Turabian

Abdalla, A. S., Elfadil, A. D. and Mohamed, M. R. "Performance evaluation of a modified seed drill for row crop planting under rainfed farming conditions". Journal of Bioscience and Agriculture Research, 16 no.01(2017):1301-1308.

Journal BiNET | Scientific Publication

- ✓ Faster processing & peer review
- ✓ International editorial board
- ✓ 29 business days publication
- ✓ Greater audience readership
- ✓ Indexing & bibliographic integration
- ✓ Social sharing enabled

Submission or email to submit@journalbinet.com

www.journalbinet.com/article-submission-form.html